

## Stair Climber appliance trolley

### HTAS

- Loop handle.
- Non-marking tube to prevent damage to goods.
- Fully welded, 1.6 mm wall tubular steel.

Load capacity	220 kg
Frame height	1540 mm
Toe plate open (WxD)	455 x 185 mm
Wheels	150 mm stairclimber assembly
Finish	Powder-coated

## Box n' Bag hand truck

### HTBNB

- Ideal for heavy loads of boxed and bagged products.
- The axle is specifically designed for load-bearing and easy-tilting, doing the heavy work for you.
- Multi-grip loop handle.

Load capacity	300 kg
Frame size (LxW)	1400 x 370 mm
Base plate size (L x W)	430 x 240 mm
Wheels	265 mm diameter x 70 mm wide black pneumatic on steel rim
Finish	Powder-coated

## All Rounder hand truck

### HTAR

- Ideal for moving drums, barrels, tubs, gas cylinders, garden ornaments, truck parts, paint cans, appliances and boxed goods.
- Specifically designed load-bearing and easy-tilting axle.
- Ergonomic hand grips.

Load capacity	300 kg
Frame size (LxW)	1400 x 370 mm
Base plate size (L x W)	430 x 240 mm
Wheels	265 mm diameter x 70 mm wide black pneumatic on steel rim
Finish	Powder-coated

## Super Mover hand truck

### HTSP

- Two hand grip levels.
- Loop handle.
- Easy tilting floating axle to minimise effort required to tilt heavy loads backwards.
- Structural steel, fully welded.

Load capacity	300 kg
Frame size (LxW)	1560 x 430 mm
Base plate size (L x W)	430 x 240 mm
Wheels	320 mm diameter x 80 mm wide black pneumatic on steel rim
Finish	Powder-coated

## Pallet positioner

### PL2000G

- Galvanized finish.
- Load setting is a simple process.
- Dramatically reduces the effort required to pack palletised goods.
- Built in turntable allows simple load rotation and access to all sides.

Load capacity	2000 kg
Platform diameter	1110 mm
Height range	240-705 mm
Base size	920 x 930 mm
Net weight	105 kg

## Pallet positioner

### PL2000P

- Powder-coated safety yellow finish.
- Load setting is a simple process.
- Dramatically reduces the effort required to pack palletised goods.
- Built in turntable allows simple load rotation and access to all sides.

Load capacity	2000 kg
Platform diameter	1110 mm
Height range	240-705 mm
Base size	920 x 930 mm
Net weight	105 kg

## Carton trolley hand truck

### TSHTSB

- Easy lean back frame.
- Ergonomic handle.
- Heavy duty construction.
- Extra-wide reinforced steel baseplate.

Load capacity	300 kg
Frame size	1330 x 510 mm
Base plate	Extra-wide reinforced steel shoe tailor-made for beverage cartons.
Wheels	150 mm diameter puncture proof pneumatic wheels
Finish	Powder-coated

## Appliance hand truck

### HTAP

- Designed for transporting heavy and large objects such as fridges and cabinets.
- Heavy duty construction with solid axle.
- Pneumatic wheels.
- Loop handle.
- Fully welded, 1.6 mm wall tubular steel.

Load capacity	220 kg
Frame size	1540 x 612 mm
Base plate (L x W)	455 x 185 mm
Wheels	250 mm diameter pneumatics
Finish	Powder-coated



## Super Mover hand truck

HTSP



\$ 492.20 (+ GST)



## All Rounder hand truck

HTAR



\$ 422.65 (+ GST)



## Box n' Bag hand truck

HTBNB




\$ 428.00 (+ GST)



## Stair Climber appliance trolley

HTAS

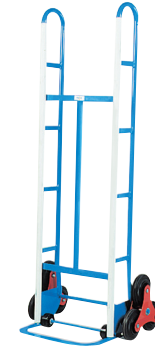


\$ 385.20 (+ GST)



## Appliance hand truck

HTAP

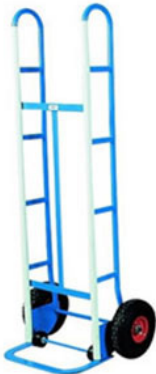

\$ 310.30 (+ GST)



## Carton trolley hand truck

TSHTSB



\$ 374.50 (+ GST)



## Pallet positioner

PL2000P



\$ 2,621.50 (+ GST)



## Pallet positioner

PL2000G



\$ 2,728.50 (+ GST)

## Galvanised platform trolley (450 kg)

### IT450

- Handle is bolted to platform and does not fold down for shipping (but can be removed).
- Front bumpers to prevent damage to walls.

Load capacity	450 kg
Handle height	950 mm
Platform size (LxW)	1140 x 565 mm
Castors	4 x 150 mm swivel, non-marking rubber, 2 x 200 mm wheels (in centre) for ease of steering
Finish	Galvanized

## Three-tier trolley (170 kg)

### IT170

- Three-tier trolley.
- Non-slip vinyl decks with rubber bumper on all decks.
- Supplied flat-packed.
- Low maintenance.

Load capacity	170 kg
Height	1000 mm
Platform size (LxW)	785 x 485 mm
Castors	100 mm diameter (2 swivel, 2 fixed)
Finish	Powder-coated

## Two-tier trolley (220 kg)

### IT220

- Two tier trolley with non-slip vinyl decks.
- Rubber bumper on both decks.
- Supplied flat-packed.
- Low maintenance.

Load capacity	340 kg
Height	860 mm
Platform size (LxW)	785 x 485 mm
Castors	100 mm diameter (2 swivel, 2 fixed)
Finish	Powder-coated

## Platform trolley (150 kg)

### IT150

- Fold-down handle.
- Low maintenance non-slip vinyl deck.
- Rubber bumper.
- Powder-coat finish.

Load capacity	150 kg
Platform size	740 x 480 mm
Handle height	1000 mm
Unit weight	11 kg
Castors	100 mm diameter, grey rubber, 2 x swivel, 2 x fixed.

## Wire caged stock trolley

### ITC340

- Heavy duty trolley with full mesh sides and fold-down gate.
- Grey powder-coat finish.

Load capacity	340 kg
Platform size	900 x 600 mm
Handle height	930 mm
Platform height	155 mm
Castors	100 mm diameter, non-marking rubber, 2 x swivel, 2 x fixed.

## Platform trolley (520 kg)

### IT520

- Handle is bolted to platform and does not fold down for shipping.

Load capacity	520 kg
Handle height	1050 mm
Platform size (LxW)	1200 x 700 mm
Castors	150 mm diameter, non-marking rubber, 4 x swivel, 2 x fixed (in centre)
Finish	Powder-coat

## Platform trolley (500 kg)

### IT500

- Bolted-on handle.
- Low-maintenance non-slip vinyl deck.
- Rubber bumper.
- Powder-coat finish.
- Supplied flat-packed.

Load capacity	500 kg
Platform size	1170 x 765 mm
Handle height	865 mm
Unit weight	35 kg
Castors	200 mm diameter, black rubber/spoked rim, 2 x swivel, 2 x fixed.

## Two-tier trolley with basket (340 kg)

### IT2TC340

- Two tier heavy duty trolley with top basket.
- Grey powder-coat finish.

Load capacity	340 kg
Platform size	900 x 600 mm
Handle height	930 mm
Height between levels	400 mm
Depth of basket	240 mm
Height to top of basket	840 mm



## Platform trolley (150 kg)

IT150



\$ 246.10 (+ GST)



## Two-tier trolley (220 kg)

IT220



\$ 513.60 (+ GST)



## Three-tier trolley (170 kg)

IT170



\$ 609.90 (+ GST)



## Galvanised platform trolley (450 kg)

IT450



\$ 727.60 (+ GST)



## Two-tier trolley with basket (340 kg)

IT2TC340



\$ 802.50 (+ GST)



## Platform trolley (500 kg)

IT500



\$ 888.10 (+ GST)



## Platform trolley (520 kg)

IT520



\$ 877.40 (+ GST)



## Caged trolley (320 kg)

ITC340



\$ 845.30 (+ GST)

## Two-Tier trolley (300 kg)

### HB220D

- Two tier trolley with non-slip vinyl decks.
- Rubber bumper on both decks.
- Supplied flat-packed for easy transportation.

Load capacity	300 kg
Platform size	965 x 615 mm
Handle height	950 mm
Castors	125 mm diameter grey rubber, two swivel, two fixed.
Finish	Chrome handles/uprights.

## Platform trolley (340 kg)

### TS1A

- Fully welded construction.
- Handle is bolted to platform and does not fold down for shipping (but can be removed).

Load capacity	340 kg
Handle height	920 mm
Platform size (LxW)	900 x 600 mm
Castors	100 mm grey non-marking rubber, 2 swivel, 2 fixed
Finish	Powder-coated in grey

## Platform trolley (300 kg)

### IT300

- Two handles (can be removable for transportation).
- Low-maintenance non-slip vinyl deck.
- Rubber bumper.
- Powder-coat finish.
- Supplied flat-packed, ready to assemble.

Load capacity	300 kg
Platform size	1160 x 760 mm
Handle height	1000 mm
Unit weight	43 kg
Castors	160 mm diameter, non-marking rubber, 2 x swivel, 2 x fixed.

## Platform trolley (250 kg)

### TSL11

- Fold-down handle.
- Low maintenance non-slip vinyl deck.
- Rubber bumper.
- Powder-coat finish.

Load capacity	250 kg
Platform size	890 x 600 mm
Handle height	1000 mm
Unit weight	19 kg
Castors	125 mm diameter, grey rubber, 2 x swivel, 2 x fixed.

## Mobile scissor lift (500 kg)

### SLM500

- Positive braking system on rear wheels.
- Manual push.
- Precision hydraulic foot pump.
- Quick release system.

Load capacity	500 kg
Platform size	850 x 500 mm
Height range	285-880 mm
Unit weight	81 kg
Handle height	990 mm
Castors	127 mm diameter, 2 x swivel with brake, 2 x fixed.

## Lift table 500kg

### LT500IM

- Safety yellow and black painted finish.
- Low tension (24 Volt) control box with up/down buttons.

Load capacity	500 kg
Platform size	1300 x 800 mm
Height range	190-1010 mm
Unit weight	160 kg
Elevation time	15 seconds
Lifting speed (with load)	55 seconds
Lowering speed (with load)	40 seconds
Motor (kW)	0.75

## Electric Bin Trolley

### SIC1169

- Up to 1.5 hours of continuous operation.
- Two speeds—slow and fast.
- Emergency magnetic brake.

Bin compatibility	Two sets of loading hooks are provided: <ul style="list-style-type: none"> <li>Lower hooks for loading small bins (eg. 120, 140 litre).</li> <li>Upper hooks for loading larger bins (eg. 240 litre, some 360 litre bins).</li> </ul>
Motor	Dual 24V 180W electric motors operating through worm drives directly onto the axle
Battery	Dual 12V x 15Ah batteries

## Two tier stock picking trolley

### ITD220

- Two tier trolley.
- Can hold two tubs/crates comfortably (tubs are sold separately).

Load capacity	220 kg
Handle height	1000 mm
Dimensions (LxW)	420 x 950 mm
Castors	125 mm diameter
Finish	Powder-coat

**Platform trolley (250 kg)**

TSL11



\$ 310.30 (+ GST)

**Platform trolley (300 kg)**

IT300



\$ 513.60 (+ GST)

**Platform trolley (340 kg)**

TS1A



\$ 513.60 (+ GST)

**Two-Tier trolley (300 kg)**

HB220D



\$ 545.70 (+ GST)

X

X

\$ x (+ GST)

X

X

\$ x (+ GST)

**Lift table (500 kg)**

LT500IM



\$ 4,162.30 (+ GST)

**Mobile scissor lift (500 kg)**

SLM500



\$ 888.10 (+ GST)

## Mobile veterinarian scissor lift (500 kg)

### SLMV500

- Rear braking system.
- Overload bypass valve.
- Manual-assisted lift.
- Hydraulic foot pump and quick release system.

Load capacity	500 kg
Platform size	1600 x 810 mm
Height range	286-915 mm
Foot pumps to maximum height	45
Handle height	990 mm
Castor diameter	127 mm

## Mobile double scissor lift (350 kg)

### SLM350

- Rear braking system.
- Overload bypass valve.
- Manual-assisted lift.
- Hydraulic foot pump and quick release system.

Load capacity	350 kg
Platform size	910 x 500 mm
Height range	355-1300 mm
Foot pumps to maximum height	53
Handle height	975 mm
Castor diameter	125 mm

## Mobile scissor lift (200 kg)

### SLM200

- Rear braking system.
- Overload bypass valve.
- Manual-assisted lift.
- Hydraulic foot pump and quick release system.

Load capacity	200 kg
Platform size	100 x 500 mm
Height range	390-1000 mm
Foot pumps to maximum height	26
Handle height	1100 mm
Castor diameter	200 mm

## Mobile scissor lift

### SLM150

- Rear braking system.
- Overload bypass valve.
- Manual-assisted lift.
- Manual push, precision hydraulic foot pump and quick release system.

Load capacity	150 kg
Platform size	700 x 450 mm
Height range	220-750 mm
Foot pumps to maximum height	16
Handle height	950 mm
Castor diameter	100 mm

## Powered mobile scissor lift (250kg)

### SLB250

- High duty cycle, 240V rechargeable 12V battery.
- Push button control.
- Powder-coated for a quality finish.
- Up to 150 lifts per charge.

Load capacity	250 kg
Platform size	895 x 480 mm
Height range	505-1505 mm
Elevation time	20 sec
Unit weight	50 kg
Castors	147 mm diameter, 2 x swivel with brake, 2 x fixed.

## Powered mobile double scissor lift (100kg)

### SLB100

- High duty cycle, 240V rechargeable 12V battery.
- Push button control.
- Powder-coated for a quality finish.
- Up to 150 lifts per charge.

Load capacity	100 kg
Platform size	895 x 480 mm
Height range	365-855 mm
Elevation time	20 sec
Unit weight	43 kg
Castors	147 mm diameter, 2 x swivel with brake, 2 x fixed.

## Mobile double scissor lift (1000 kg)

### SLM1000H

- Rear braking system.
- Overload bypass valve.
- Manual-assisted lift.
- Hydraulic foot pump and quick release system.

Load capacity	1000 kg
Platform size	1200 x 610 mm
Height range	500-1500 mm
Foot pumps to maximum height	150
Handle height	1020 mm
Castor diameter	150 mm

## Mobile scissor lift (1000 kg)

### SLM1000

- Rear braking system.
- Overload bypass valve.
- Manual-assisted lift.
- Hydraulic foot pump and quick release system.

Load capacity	1000 kg
Platform size	1000 x 510 mm
Height range	390-1000 mm
Foot pumps to maximum height	72
Handle height	1020 mm
Castor diameter	150 mm



## Mobile scissor lift (150 kg)

SLM150



\$ 556.40 (+ GST)



## Mobile scissor lift (200 kg)

SLM200



\$ 1,391.00 (+ GST)



## Mobile double scissor lift (350 kg)

SLM350



\$ 1,059.30 (+ GST)



## Mobile veterinarian scissor lift (500 kg)

SLMV500



\$ 1,605.00 (+ GST)



## Mobile scissor lift (1000 kg)

SLM1000



\$ 1,498.00 (+ GST)



## Mobile double scissor lift (1000 kg)

SLM1000H



\$ 3,092.30 (+ GST)



## Powered mobile scissor lift (100kg)

SLB100



\$ 4,269.30 (+ GST)



## Powered mobile scissor lift (250kg)

SLB250



\$ 3,616.60 (+ GST)



## Rugged (powered) bin lifter

### BLEH1800

- Battery powered, electro-hydraulic operation.
- Suitable for up to 50 lifts per day.
- Fits through internal doorways.

Lift capacity	150 kg
Highest tip point	3752 mm
Skip bin compatibility	1800 mm
Wheelie bin compatibility	80, 120, 140 and 240 litre

## Rugged (manual) bin lifter

### BLHP1500

- Spark-free hydraulic hand pump operation.
- Suitable for up to 10 lifts per day, per person.
- Fits through internal doorways.

Lift capacity	100 kg
Highest tip point	3250 mm
Skip bin compatibility	1500 mm
Wheelie bin compatibility	80, 120, 140 and 240 litre

## Ecolift bin lifter

### ECOLIFT50

- Manual crank winding operation.
- Recommended up to 6 lifts per day, per person.
- Fits through internal doorways with winch handle removed.
- Lift-and-tilt mechanism.

Lift capacity	50 kg
Highest tip point	2800 mm
Skip bin compatibility	Up to 1500 mm
Wheelie bin compatibility	80, 120, 140 and 240 litre
Dimensions (L/W/H)	1200/800/2000 mm

## Niftylift bin lifter

### NIFTYLIFT30

- Manual assisted lift operation.
- Recommended up to 2 lifts per day, per person.
- Fits through internal doorways.
- Slow-release gas struts ensure the bin is lifted and lowered safely.

Lift capacity	30 kg
Highest tip point	2850 mm
Skip bin compatibility	1500 mm
Wheelie bin compatibility	120 and 240 litre
Dimensions (L/W/H)	900/800/1420 mm

## Modular bin trailer

### MODULAR6

- Move up to six wheelie bins.
- Gas strut actuated bin ramp.
- Fits within one standard car parking space.
- Comes with a pin-hitch coupling as standard.
- Also available with tow ball or bar hitch couplings.
- Supplied flat-packed ready for assembly.

Load capacity	240 kg (per bin bay)
Wheelie bin compatibility	80, 120, 140, 240 and 360 litre
Dimensions (L/W/H)	2874/1378/1447 mm

## Modular bin trailer

### MODULAR3

- Move up to three wheelie bins.
- Gas strut actuated bin ramp.
- Fits within one standard car parking space.
- Comes with a pin-hitch coupling as standard.
- Also available with tow ball or bar hitch couplings.
- Supplied flat-packed ready for assembly.

Load capacity	240 kg (per bin bay)
Wheelie bin compatibility	80, 120, 140, 240 and 360 litre
Dimensions (L/W/H)	2850/700/1432 mm

## Universal bin lifter

### UBL250HYD1800

- Push button operated.
- Will lift over 100 times per day on one charge.
- Safety cage, lockable door & braking castors.
- Lift-and-tilt mechanism.

Lift capacity	250 kg
Highest tip point	2800 mm
Skip bin compatibility	1800 mm
Wheelie bin compatibility	80, 120, 140 and 240 litre
Dimensions (L/W/H)	1500/980/2200 mm

## Simplicity Plus bin lifter

### SIMPLUS150HY1800

- Push button operated.
- Recommended up to 100 lifts per day.
- Safety cage and braking castors.
- Lift-and-tilt mechanism.

Lift capacity	150 kg
Highest tip point	2800 mm
Skip bin compatibility	1800 mm
Wheelie bin compatibility	80, 120, 140 and 240 litre
Dimensions (L/W/H)	1500/980/2200 mm

### Niftylift bin lifter

NIFTYLIFT30



\$ 2,420.50 (+ GST)

### Ecolift bin lifter

ECOLIFT50



\$ 3,990 (+ GST)

### Rugged (manual) bin lifter

BLHP1500



Ask about our All Terrain model.



\$ 6,500 (+ GST)

### Rugged (powered) bin lifter

BLEH1800



Ask about our All Terrain model.



\$ 8,875.65 (+ GST)

### Simplicity Plus bin lifter

SIMPLUS150HY1800



\$ 11,860 (+ GST)

### Universal bin lifter

UBL250HYD1800



\$ 12,400 (+ GST)

### Modular bin trailer

MODULAR3



Bins not included.



\$ 2,391.45 (+ GST)

### Modular bin trailer

MODULAR6



\$ 4,795.75 (+ GST)

## Low profile pallet

### PTLP300

- Entry and exit rollers for easier operation and to protect load roller and pallet.
- Totally sealed hydraulic pump with a slow lowering hand control valve.
- Fully adjustable push rod under forks.
- 3-position control handle, lower, neutral & lift.

Load capacity	1000 kg
Fork height range (min to max)	35–90 mm
Fork (L x W)	1120 x 160 mm
Overall fork width	540 mm

## Standard pallet truck (685 mm wide)

### PT685

- Entry and exit rollers for easier operation and to protect load roller and pallet.
- Totally sealed hydraulic pump with a slow lowering hand control valve.
- Fully adjustable push rod under forks.
- 3-position control handle, lower, neutral & lift.

Load capacity	2500 kg
Fork height range (min to max)	75–190 mm
Fork (L x W)	1150 x 160 mm
Overall fork width	685 mm

## Standard pallet truck (520 mm wide)

### PT520

- Entry and exit rollers for easier operation and to protect load roller and pallet.
- Totally sealed hydraulic pump with a slow lowering hand control valve.
- Fully adjustable push rod under forks.
- 3-position control handle, lower, neutral & lift.

Load capacity	2500 kg
Fork height range (min to max)	75–190 mm
Fork (L x W)	1150 x 160 mm
Overall fork width	520 mm

## Standard pallet truck (450 mm wide)

### PT450

- Entry and exit rollers for easier operation and to protect load roller and pallet.
- Totally sealed hydraulic pump with a slow lowering hand control valve.
- Fully adjustable push rod under forks.
- 3-position control handle, lower, neutral & lift.

Load capacity	2500 kg
Fork height range (min to max)	85–200 mm
Fork (L x W)	1150 x 160 mm
Overall fork width	450 mm

## Strong Arm Hoist

### SIS4HW

- A cantilever crane designed to be statically bolted to a concrete floor (such as a loading bay).
- A hand winch is low-g geared to ensure loads of up to 500 kg can be easily raised, while precise positioning of the load is achieved through geared hand-slewing of the mast.
- Suitable for lifting loads between floors.
- Ideal for plant equipment, workshops, manufacturing, factories.

Lift capacity	500 kg
Operation method	Hand winch
Dimensions (L/W/H)	1171/508/1557 mm

## Short pallet truck

### PTS450

- Entry and exit rollers for easier operation and to protect load roller and pallet.
- Totally sealed hydraulic pump with a slow lowering hand control valve.
- Fully adjustable push rod under forks.
- 3-position control handle, lower, neutral & lift.

Load capacity	2500 kg
Fork height range (min to max)	80-190 mm
Fork (L x W)	800 x 160 mm
Overall fork width	450 mm

## Long pallet truck

### PTL685

- Entry and exit rollers for easier operation and to protect load roller and pallet.
- Totally sealed hydraulic pump with a slow lowering hand control valve.
- Fully adjustable push rod under forks.
- 3-position control handle, lower, neutral & lift.

Load capacity	2000 kg
Fork height range (min to max)	85-200 mm
Fork (L x W)	2400 x 160 mm
Overall fork width	685 mm

## Wide pallet truck

### PTW900

- Entry and exit rollers for easier operation and to protect load roller and pallet.
- Totally sealed hydraulic pump with a slow lowering hand control valve.
- Fully adjustable push rod under forks.
- 3-position control handle, lower, neutral & lift.

Load capacity	2500 kg
Fork height range (min to max)	75-190 mm
Fork (L x W)	1150 x 160 mm
Overall fork width	900 mm



## Standard pallet truck (450 mm wide)

PT450



\$ 524.30 (+ GST)



## Standard pallet truck (520 mm wide)

PT520



\$ 524.30+ GST)



## Standard pallet truck (685 mm wide)

PT685



\$ 524.30 (+ GST)



## Low profile pallet

PTLP300



\$ 1,048.60 (+ GST)



## Wide pallet truck

PTW900




\$ 1,605.00 (+ GST)



## Long pallet truck

PTL685

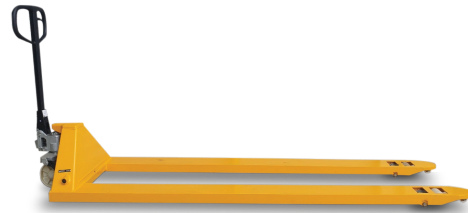

\$ 2,247.00 (+ GST)



## Short pallet truck

PTS450



\$ 866.70 (+ GST)



## Strong Arm Hoist

SIS4HW



\$ 5,255 (+ GST)



## Tug Axis 4T

### TUGAXIS4TNH

- Tow up to 4 tonne on flat ground, with reduced towing capacity up to 8 degrees.
- Battery operated.
- Turret with turret lock for easy reversing.
- A wide range of hitches available.
- Suitable for large retail and heavy industrial towing.

Load capacity	4000 kg
Maximum speed	Up to 5 km / hour
Speed mode	Three speed control with forward, reverse and emergency stop.
Dimensions	1465/790/875 mm



## Tug Axis 2T

### TUGAXIS2TNH

- Tow up to 2 tonne on flat ground, with reduced towing capacity up to 8 degrees.
- Battery operated.
- Turret with turret lock for easy reversing.
- A wide range of hitches available.
- Suitable for retail and light industrial towing.

Load capacity	2000 kg
Maximum speed	Up to 5 km / hour
Speed mode	Three speed control with forward, reverse and emergency stop.
Dimensions	1480/610/852 mm



## Tug Axis 1T

### TUGAXIS1TNH

- Tow up to 1 tonne on flat ground, with reduced towing capacity up to 8 degrees.
- Battery operated.
- Turret with turret lock for easy reversing.
- A wide range of hitches available.
- Suitable for retail and light industrial towing.

Load capacity	1000 kg
Maximum speed	Up to 5 km / hour
Speed mode	Three speed control with forward, reverse and emergency stop.
Dimensions	1480/610/852 mm



## Tug Compact

### TUGCOM500NH

- Tow up to 500 kg on flat ground.
- Battery operated.
- Non-marking tyres.
- Wide variety of hitches available.
- Suitable for medical & commercial towing.

Load capacity	500 kg
Maximum speed	Up to 5 km / hour
Speed mode	Three speed control with forward, reverse and emergency stop.
Dimensions	650/610/934 mm



## Follow-Me trolley

### FOLLOWMETRLY

- High manoeuvrability of trolley trains through tight corners and S-bends.
- Quick release levers for easy hitching and unhitching.
- Articulation system can be retrofitted to your existing fleet of trolleys.
- Can be ordered separately or with the Tug Compact.
- Using a powered Tug, tow a chain of up to 10 Follow-Me trolleys with ease.

Suitable for retail or industrial environments.

Dimensions (L/W/H)	819/411/943 mm (standard size)
--------------------	--------------------------------



## Powered bin trolley

### POWBINTROLLEY

- Move up to three wheelie bins, weighing up to 400 kg over a flat surface.
- Powered drive wheel can carry loads over ramps up to 5°.
- Smart design with easy turning action.
- Tiller control keeps you in front of load.
- Made in Australia.

Load capacity	400 kg
Maximum speed	Up to 4 km / hour
Wheelie bin compatibility	80, 120, 140 and 240 litre
Dimensions (L/W/H)	2887/739/1596 mm



## Tug Rise 1T

### TUGRISE1TNH

- Tow up to one tonne on a 15° incline.
- Battery operated.
- A wide range of hitches available.
- Suitable for moving heavy bins and trolleys on sloped driveways and ramps, around high-rise buildings/apartment basements, or around caravan parks.

Load capacity	2000 kg
Maximum speed	Up to 3 km / hour
Speed mode	Three speed control with forward, reverse and emergency stop.
Dimensions	1800/902/894 mm



## Tug Axis 5T

### TUGAXIS5TNH

- Tow up to 5 tonne on flat ground, with reduced towing capacity up to 8 degrees.
- Battery operated.
- Turret with turret lock for easy reversing.
- A wide range of hitches available.
- Suitable for large retail and heavy industrial towing.

Load capacity	5000 kg
Maximum speed	Up to 5 km / hour
Speed mode	Three speed control with forward, reverse and emergency stop.
Dimensions	1740/900/905 mm

## Tug Compact

TUGCOM500NH

Ask about our range of hitches.



 \$10,370 (+ GST)

## Tug Axis 1T

TUGAXIS1TNH

Ask about our range of hitches.



 \$12,915 (+ GST)

## Tug Axis 2T

TUGAXIS2TNH

Ask about our range of hitches.



 \$13,900 (+ GST)

## Tug Axis 4T

TUGAXIS4TNH

Ask about our range of hitches.



 \$16,990 (+ GST)

## Tug Axis 5T

TUGAXIS5TNH

Ask about our range of hitches.



 \$17,990 (+ GST)

## Tug Rise 1T

TUGRISE1TNH

Ask about our range of hitches.



 \$17,990 (+ GST)

## Powered bin trolley

POWBINTROLLEY



 \$13,370 (+ GST)

## Follow-Me trolley

FOLLOWMETRLY



 \$13,370 (+ GST)

## Recycled black plastic tub (52 litre)

### AP10

- 100% recycled black polypropylene tub (stackable).
- Lid is an additional item APLID.
- Not suitable for food storage.

Length x width	645 x 413 mm
Height	276 mm
Capacity	52 litre

## Container skates

### CS32SET

- Container skates can manoeuvre a container into a position where a forklift can't go.
- Ideal for ISO container transport.
- The double roller design results in easy steering due to reduced friction forces.

Deck height	155 mm
Handle	Can be turned to a maximum of 45 degrees left or right.
Turning circle	<ul style="list-style-type: none"> <li>20' (6 m) container, radius of turning circle is 6 m.</li> <li>40' (12 m) container, radius of turning circle is 10 m.</li> </ul>
Wheels	Nylon (smooth and easy run on concrete floors.)

## Drum dolly

### DD610ID

- Drum dolly allows for convenient portability.
- Easy bolt together assembly.
- All welded steel frame with PU castors.
- Powder-coated safety yellow.
- Wheels are set on the outer rim for a more even balance and greater stability.

Load capacity	400 kg
Height	155 mm
Inner diameter	610 mm
Castor diameter	75 mm
Suits drum type	208 litre
Unit weight	7 kg

## Tilting drum stand

### HTTDS

- Supplied flat packed.
- Perfect for manoeuvring drums and decanting.
- Handles can be extended and retracted.
- Steel construction.
- Plastic hand grips on handles.

Load capacity	170 kg
Front wheel diameter	125 mm
Rear castor diameter	100 mm
Suits drum type	210 litre
Unit weight	14.5 kg

## Recycled black plastic tub (32 litre)

### AP07

- 100% recycled black polypropylene tub (stackable).
- Lid is an additional item APLID.
- Not suitable for food storage.

Length x width	645 x 413 mm
Height	210 mm
Capacity	32 litre

## Safety step

### SS

- Mobile safety step with spring-loaded castors.
- Durable one piece plastic construction with anti-slip surface.
- Stackable and totally mobile.

Load capacity	180 kg
Height	395 mm
Platform diameter	315 mm
Unit weight	4.2 kg

## Jumbo safety step

### JSS

- Mobile safety step with spring-loaded castors.
- Durable one piece plastic construction with anti-slip surface.
- Stackable and totally mobile.

Load capacity	150 kg
Height	360 mm
Platform diameter	380 mm
Unit weight	3 kg

## Square safety step (Monstar)

### SQSSMON

- Large safety step with rubber feet for safety.
- Durable one piece plastic construction with anti-slip surface.
- Stackable and totally mobile.

Load capacity	180 kg
Height	375 mm
Platform size	370 x 370 mm
Unit weight	3.5 kg

## Tilting drum stand

HTTDS



\$ 363.80 (+ GST)

## Drum dolly


DD610ID



\$ 128.40 (+ GST)

## Container skates

CS32SET

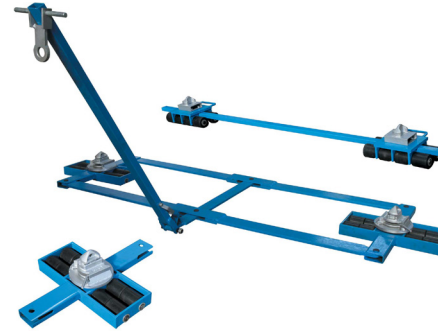

\$ 3,670.10 (+ GST)

## Recycled black plastic tub (52 litre) – no lid

AP10



\$ 24.00 (+ GST)

## Square safety step (Monstar)

SQSSMON



\$ 101.65 (+ GST)

## Jumbo safety step

JSS



\$ 209.72 (+ GST)

## Safety step

SS



\$ 177.62 (+ GST)

## Recycled black plastic tub (32 litre) – no lid

AP07



\$ 21.00 (+ GST)



## Recycled black plastic tub lid

---

### AP-LID

- Suits AP07, AP10 and AP15 plastic tubs.
- 100% recycled black polypropylene tub.
- 100% recyclable.

---

Length x width	656 x 425 mm
Height	32 mm

---

## Recycled black plastic tub (68 litre)

---

### AP15

- 100% recycled black polypropylene tub.
- 100% recyclable.
- Tubs are stackable.
- Not suitable for food storage.

---

Length x width	645 x 413 mm
Height	397 mm
Capacity	68 litre

---

## Recycled black plastic tub (68 litre)

---

AP15



**\$ 32.00** (+ GST)

## Recycled black plastic tub lid

---

AP-LID



**\$ 12.00** (+ GST)