

Mobile veterinarian scissor lift (500 kg)

SLMV500

- Manual push and quick release system.
- Precision hydraulic foot pump enables smooth and effortless lifting.

Table dimensions (L/W/H)	1600 x 810 mm
Height range	286-915 mm
Handle height	975 mm
Castor wheel	125 x 40 mm
Unit weight	154 kg
Load capacity	500 kg

Mobile double scissor lift (350 kg)

SLM350

- Manual push and quick release system.
- Precision hydraulic foot pump.
- Lockable swivel PU castors with toe guard.

Table dimensions (L/W/H)	910 x 500 x 35 mm
Height range	355-1300 mm
Handle height	975 mm
Castor wheel	125 x 40 mm
Unit weight	105 kg
Load capacity	350 kg

Rough terrain mobile scissor lift (200 kg)

SLM200

- Suitable for rough terrain or uneven surfaces.
- Manual push and quick release system.
- Ideal for use in warehouses, construction sites, and outdoor settings.

Table dimensions (L/W/H)	1000 x 500 x 35 mm
Height range	345-1010 mm
Handle height	1050 mm
Castor wheel	200 mm
Unit weight	85 kg
Load capacity	200 kg

Mobile scissor lift

SLM150

- Compact design makes it suitable for small work areas.
- Load capacity of 150 kg.
- Ideal for use in warehouses, workshops and retail environments.

Table dimensions (L/W/H)	700 x 450 x 36 mm
Height range	220-750 mm
Handle height	950 mm
Castor wheel	100 x 25 mm
Unit weight	49 kg
Load capacity	150 kg

Mobile scissor lift (750kg)

SLM750

- Manual push and quick release system.
- Precision hydraulic foot pump enables smooth and effortless lifting.

Table dimensions (L/W/H)	1000 x 510 x 55 mm
Height range	420-900 mm
Handle height	1000 mm
Castor wheel	147 x 50 mm
Unit weight	125 kg
Load capacity	750 kg

Mobile double scissor lift (700kg)

SLM700

- Manual push and quick release system.
- Precision hydraulic foot pump enables smooth and effortless lifting.

Table dimensions (L/W/H)	1220 x 610 x 53 mm
Height range	445-1500 mm
Handle height	1015 mm
Castor wheel	125 x 40 mm
Unit weight	195 kg
Load capacity	700 kg

Mobile scissor lift (500 kg)

SLM500

- Manual push and quick release system.
- Precision hydraulic foot pump enables smooth and effortless lifting.

Table dimensions (L/W/H)	850 x 880 x 50 mm
Height range	285-880 mm
Handle height	990 mm
Castor wheel	125 x 40 mm
Unit weight	85 kg
Load capacity	500 kg

Mobile scissor lift (300 kg)

SLM300

- Manual push and quick release system.
- Precision hydraulic foot pump enables smooth and effortless lifting.

Table dimensions (L/W/H)	850 x 500 x 50 mm
Height range	285-880 mm
Handle height	990 mm
Castor wheel	125 x 40 mm
Unit weight	81 kg
Load capacity	300 kg

Mobile scissor lift (150 kg)

SLM150



\$ 459 (+ GST)

Rough terrain mobile scissor lift (200 kg)

SLM200



\$ 899 (+ GST)

Mobile double scissor lift (350 kg)

SLM350



\$ 895 (+ GST)

Mobile veterinarian scissor lift (500 kg)

SLMV500



\$ 1,290 (+ GST)

Mobile scissor lift (300 kg)

SLM300



\$ 710 (+ GST)

Mobile scissor lift (500 kg)

SLM500



\$ 750 (+ GST)

Mobile double scissor lift (700 kg)

SLM700



\$ 1,790 (+ GST)

Mobile double scissor lift (750 kg)

SLM750



\$ 1,130 (+ GST)

Ratchet strap (for appliance hand trucks)

11-1003-B

- Safety ratchet strap suitable for appliance hand truck trolleys.
- Reliable mechanism for tightening and securing heavy whitegoods and furniture, ensuring loads remain stable during transit.

Strap length	4.3 m
Strap material	Tough nylon housing that protects strap and spring from weather.
Hardware material	Galvanised steel components.
Weight	1.3 kg

Box n' Bag hand truck

HTBNB 11-1003-B (optional ratchet strap)

- EASI TILT® axle mechanism that reduces effort required to move heavy loads—specifically for load-bearing and easy-tilting.
- A ratchet strap can be fitted to secure loads.

Frame size (L x W)	1290 x 370 mm
Base plate size (L x W)	430 x 240 x 9 mm
Load support	A full-height, flat surface RHS frame.
Wheels	260 mm diameter pneumatic
Load capacity	300 kg

All Rounder hand truck

HTAR 11-1003-B (optional ratchet strap)

- EASI TILT® axle mechanism that reduces effort required to move heavy loads—specifically for load-bearing and easy-tilting.
- A ratchet strap can be fitted to secure loads.

Frame size (L x W)	1400 x 300 mm
Base plate size (L x W)	430 x 240 x 9 mm
Load support	Curved support with 60 mm set back. Adjustable drum holding hook.
Wheels	260 mm diameter pneumatic
Load capacity	300 kg

Super Mover hand truck

HTSP 11-1003-B (optional ratchet strap)

- EASI TILT® axle mechanism that reduces effort required to move heavy loads—specifically for load-bearing and easy-tilting.
- A ratchet strap can be fitted to secure loads.

Frame size (L x W)	1560 x 430 mm
Base plate size (L x W)	430 x 240 x 9 mm
Load support	A full-height, flat surface RHS frame.
Wheels	320 mm diameter pneumatic
Load capacity	300 kg

Galvanised pallet truck

GPT685

- Made from galvanised steel to provide superior corrosion resistance and long-lasting durability.

Fork height range (minimum to maximum)	75-190 mm
Fork length	1150 mm
Overall fork width	685 mm
Steering wheel	180 x 50 mm
Load roller	74 x 93 mm
Size of fork	160 x 60 mm
Load capacity	2000 kg

Standard pallet truck (685 mm wide)

PT685

- Entry and exit rollers for easier operation and to protect load roller and pallet.
- Totally sealed hydraulic pump with a slow lowering hand control valve.
- Fully adjustable push rod under forks.
- 3-position control handle, lower, neutral & lift.

Load capacity	2500 kg
Fork height range (min to max)	75-190 mm
Fork length	1150 mm
Overall fork width	685 mm

Standard pallet truck (520 mm wide)

PT520

- Entry and exit rollers for easier operation and to protect load roller and pallet.
- Totally sealed hydraulic pump with a slow lowering hand control valve.
- Fully adjustable push rod under forks.
- 3-position control handle, lower, neutral & lift.

Load capacity	2500 kg
Fork height range (min to max)	75-190 mm
Fork length	1150 mm
Overall fork width	520 mm

Standard pallet truck (450 mm wide)

PT450

- Entry and exit rollers for easier operation and to protect load roller and pallet.
- Totally sealed hydraulic pump with a slow lowering hand control valve.
- Fully adjustable push rod under forks.
- 3-position control handle, lower, neutral & lift.

Load capacity	2500 kg
Fork height range (min to max)	75-190 mm
Fork length	1150 mm
Overall fork width	450 mm

Super Mover hand truck

HTSP

11-1003-B (optional ratchet strap)



Optional
ratchet strap
\$128 (+ GST)

\$ 370 (+ GST)
Hand truck only

All Rounder hand truck

HTAR

11-1003-B (optional ratchet strap)



Optional
ratchet strap
\$128 (+ GST)

\$ 320 (+ GST)
Hand truck only

Box n' Bag hand truck

HTBNB

11-1003-B (optional ratchet strap)



Optional
ratchet strap
\$128 (+ GST)

\$ 363 (+ GST)
Hand truck only

Ratchet strap (for appliance hand trucks)

11-1003-B



\$ 127 (+ GST)

Standard pallet truck (450 mm wide)

PT450



\$ 425 (+ GST)

Standard pallet truck (520 mm wide)

PT520



\$ 425 (+ GST)

Standard pallet truck (685 mm wide)

PT685



\$ 425 (+ GST)

Galvanised pallet truck

GPT685



\$ 1,132 (+ GST)

Interlocking plastic dolly (150 kg)

PD150

- Built-in carry handles to aid transportation.
- Injection moulded plastic with an anti-slip texture to prevent loads from slipping.
- Designed to be stackable when not in use (maximum 10 high).

Platform size	600 x 405 mm
Platform height	130 mm
Castor diameter	75 mm
Wheels	Non-marking blue rubber
Load capacity	150 kg

Heavy-duty plastic platform trolley (500 kg)

IT500A

- Features a fold-down handle.
- Corrosion, rust and scratch resistant.
- Rugged and durable anti-skid panels.
- Suitable for home, office, warehouse, garage, workshop, school or markets.

Length x width	895 x 595 mm
Height	950 mm
Handle height (from ground)	925 mm
Castor diameter	150 mm
Load capacity	500 kg

Heavy-duty plastic platform trolley (1000 kg)

IT1000

- Features a fold-down handle.
- Corrosion, rust and scratch resistant.
- Rugged and durable anti-skid panels.
- Suitable for home, office, warehouse, garage, workshop, school or markets.

Length x width	1200 x 650 mm
Height	950 mm
Handle height (from ground)	930 mm
Castor diameter	150 mm
Load capacity	1000 kg

4 tier shelf utility trolley

IT135B

- Non-slip surface texture on the shelves.
- Non-marking wheels and compact design for indoor use.
- Aluminium upprights for durability.
- Features moulded shelves that won't rust, dent, or peel, ensuring long-lasting durability and easy maintenance.
- Quiet, non-marking castors.

Length x width	1032 x 508 mm
Height	1295 mm
Load capacity	135 kg

Three-tier shelf utility cart (135 kg)

IT135A

- Two or three-shelf models available.
- Non-slip surface texture on the shelves.
- Non-marking wheels and compact design for indoor use.
- Aluminium upprights for durability.
- Features moulded shelves that won't rust, dent, or peel, ensuring long-lasting durability and easy maintenance.

Length x width	1032 x 508 mm
Height	960 mm
Load capacity	135 kg

Three-tier shelf utility cart (90 kg)

IT90

- Two or three-shelf models available.
- Non-slip surface texture on the shelves.
- Non-marking wheels and compact design for indoor use.
- Aluminium upprights for durability.
- Features moulded shelves that won't rust, dent, or peel, ensuring long-lasting durability and easy maintenance.

Length x width	854 x 473 mm
Height	960 mm
Load capacity	90 kg

Two-tier shelf utility cart (135 kg)

IT135

- Two or three-shelf models available.
- Non-slip surface texture on the shelves.
- Non-marking wheels and compact design for indoor use.
- Aluminium upprights for durability.
- Features moulded shelves that won't rust, dent, or peel, ensuring long-lasting durability and easy maintenance.

Length x width	1032 x 508 mm
Height	960 mm
Load capacity	135 kg

Two-tier shelf utility cart (130 kg)

IT130

- Two or three-shelf models available.
- Non-slip surface texture on the shelves.
- Non-marking wheels and compact design for indoor use.
- Aluminium upprights for durability.
- Features moulded shelves that won't rust, dent, or peel, ensuring long-lasting durability and easy maintenance.

Length x width	854 x 473 mm
Height	960 mm
Load capacity	130 kg

4 tier shelf utility trolley

IT135B



\$ 566 (+ GST)

Heavy-duty plastic platform trolley (1000 kg)

IT1000



\$ 435 (+ GST)

Heavy-duty plastic platform trolley (500 kg)

IT500A



\$ 295 (+ GST)

Interlocking plastic dolly (150 kg)

PD150



\$ 75 (+ GST)

Two-tier shelf utility cart (130 kg)

IT130



\$ 275 (+ GST)

Two-tier shelf utility cart (135 kg)

IT135



\$ 320 (+ GST)

Three-tier shelf utility cart (90 kg)

IT90



\$ 320 (+ GST)

Three-tier shelf utility cart (135 kg)

IT135A



\$ 445 (+ GST)

Three-tier platform trolley (370 kg)

IT370B

- Two or three-tier trolley with non-slip vinyl decks.
- Rubber bumper on each deck.
- Designed with double handles for improved control and maneuverability.
- Low maintenance.
- Suitable for warehouses, workshops, and delivery tasks.

Length x width	965 x 615 mm
Height	950 mm
Load capacity	370 kg

Three-tier platform trolley (170 kg)

IT170

- Two or three-tier trolley with non-slip vinyl decks.
- Rubber bumper on each deck.
- Designed with double handles for improved control and maneuverability.
- Low maintenance.
- Suitable for warehouses, workshops, and delivery tasks.

Length x width	785 x 485 mm
Height	1000 mm
Load capacity	170 kg

Two-tier platform trolley (370 kg)

IT370A

- Two or three-tier trolley with non-slip vinyl decks.
- Rubber bumper on each deck.
- Designed with double handles for improved control and maneuverability.
- Low maintenance.
- Suitable for warehouses, workshops, and delivery tasks.

Length x width	965 x 615 mm
Height	1030 mm
Load capacity	370 kg

Two-tier platform trolley (220 kg)

IT220

- Two or three-tier trolley with non-slip vinyl decks.
- Rubber bumper on each deck.
- Designed with double handles for improved control and maneuverability.
- Low maintenance.
- Suitable for warehouses, workshops, and delivery tasks.

Length x width	785 x 485 mm
Height	860 mm
Load capacity	220 kg

Heavy duty platform trolley (520 kg)

IT520

- Handle is bolted to platform and does not fold down for shipping.

Load capacity	520 kg
Handle height	1050 mm
Platform size (LxW)	1200 x 700 mm
Castors	150 mm diameter, non-marking rubber, 4 x swivel, 2 x fixed (in centre)
Finish	Powder-coat

Fixed handle platform trolley (370 kg)

IT300A

- Fixed handle design for steady control and manoeuvrability during transport.
- Non-slip vinyl deck with rubber bumper on deck.
- High-quality castors with precision bearings.
- Designed to handle heavy loads.

Length x width	915 x 615 mm
Handle height	860 mm
Wheel diameter	125 mm (two swivel and two fixed)
Load capacity	370 kg

Foldable platform trolley (370 kg)

IT370

- Features a foldable handle for convenient storage and space-saving when not in use.
- Non-slip vinyl deck with rubber bumper on deck.
- Light to medium duty—ideal for retail, warehouse, and office use.

Length x width	915 x 615 mm
Handle height	860 mm
Wheel diameter	125 mm
Load capacity	370 kg

Foldable platform trolley (220 kg)

IT220A

- Features a foldable handle for convenient storage and space-saving when not in use.
- Non-slip vinyl deck with rubber bumper on deck.
- Light to medium duty—ideal for retail, warehouse, and office use.

Length x width	745 x 485 mm
Handle height	860 mm
Wheel diameter	100 mm
Load capacity	220 kg



Two-tier platform trolley (220 kg)

IT220



\$ 370 (+ GST)



Two-tier platform trolley (370 kg)

IT370A



\$ 415 (+ GST)



Three-tier platform trolley (170 kg)

IT170



\$ 402 (+ GST)



Three-tier platform trolley (370 kg)

IT370B



\$ 639 (+ GST)



Foldable platform trolley (220 kg)

IT220A



\$ 230 (+ GST)



Foldable platform trolley (370 kg)

IT370



\$ 288 (+ GST)



Fixed handle platform trolley (370 kg)

IT300A



\$ 260 (+ GST)



Heavy duty platform trolley (520 kg)

IT520



\$ 619 (+ GST)

Drum dolly

DD610ID

- Designed for easy transportation of 205 litre (44-gallon) drums.
- Suits drums with a 614mm diameter.
- Robust and durable construction.
- Equipped with smooth-rolling 75 mm diameter nylon castors.

Inner diameter	614 mm
Deck height	100 mm
Castors	75 mm nylon swivel (x4)
Deck material	Painted steel
Suits	205 litre drum
Capacity	300 kg

Tilting drum trolley

HTTDS

- Supplied flat packed.
- Perfect for manoeuvring drums and decanting.
- Handles can be extended and retracted.
- Steel construction.
- Plastic hand grips on handles.

Load capacity	270 kg
Cradle length	1000 mm
Front wheels	125x 35 mm
Rear wheels	100 x 35 mm
Suits drum type	210 litre
Unit weight	14.5 kg

Two-tier trolley with basket (340 kg)

IT2TC340

- Heavy duty trolley with top basket.
- Constructed with a durable, long-lasting powder-coated finish.

Load capacity	340 kg
Platform size	900x600mm
Handle height	910 mm
Castors	125 mm diameter

Caged trolley (340 kg)

ITC340

- Heavy duty trolley with full mesh sides and fold-down gate.
- Grey powder-coat finish.

Load capacity	340 kg
Platform size	900 x 600 mm
Handle height	855 mm
Castors	125 mm diameter, non-marking rubber.

Container skates—20T

CS32SET

- 20 tonne container skate set for moving containers into positions where forklifts can't go.
- Ideal for ISO container transport.
- The double roller design results in easy steering due to reduced friction forces.

Deck height	155 mm
Handle	Can be turned to a maximum of 45 degrees left or right.
Turning circle	• 20' (6 m) container, radius of turning circle is 6 m. • 40' (12 m) container, radius of turning circle is 10 m.
Wheels	Nylon (smooth and easy run on concrete floors.)

Heavy duty aluminium trolley (750 kg)

IT750XLALU

- Non-slip checker plate deck, for strength, corrosion resistance, and lightweight handling.
- Reinforced welded frame.
- Dual handle positions for flexibility.

Platform size (L/W/H)	1525 x 760 x 236 mm
Platform height	300 mm
Castor diameter	160 mm
Load capacity	750 kg

Platform trolley—aluminium (750 kg)

IT750ALU

- Non-slip checker plate deck, for strength, corrosion resistance, and lightweight handling.
- High-strength, fully welded frame.
- Dual handle positions for flexibility.

Platform size (L/W/H)	1220 x 610 x 236 mm
Handle height	910 mm
Castor diameter	160 mm
Load capacity	750 kg

Platform trolley—aluminium (550 kg)

IT550ALU

- Non-slip checker plate deck, for strength, corrosion resistance, and lightweight handling.
- Reinforced welded frame.
- Dual handle positions for flexibility.

Platform size	916 x 610 mm
Platform height	300 mm
Handle height	980 mm
Castor diameter	150 x 50 mm
Load capacity	550 kg

Caged trolley (340 kg)

ITC340



\$ 565 (+ GST)

Two-tier trolley with basket (340 kg)

IT2TC340



\$ 565 (+ GST)

Tilting drum trolley


HTTDS



\$ 295 (+ GST)

Drum dolly

DD610ID

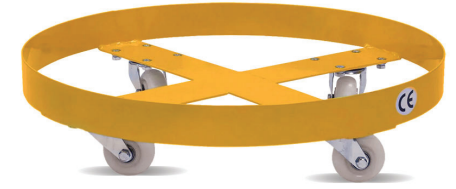

\$ 110 (+ GST)

Platform trolley—aluminium (550 kg)

IT550ALU



\$ 470 (+ GST)

Platform trolley—aluminium (750 kg)

IT750ALU



\$ 599 (+ GST)

Heavy duty aluminium trolley (750 kg)


IT750XLALU



\$ 735 (+ GST)

Container skates—20T

CS32SET

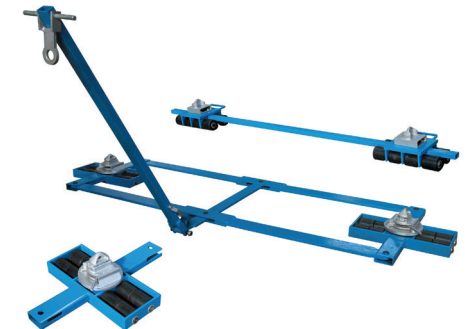

\$ 2,190 (+ GST)

Galvanised add-on shelf

IT450GSHELF

- Add-on shelf for galvanised platform trolley (IT450G) to transform it into a twin deck platform trolley.
- Durable galvanised finish for enhanced corrosion resistance suited to cool rooms, refrigerated areas and high-moisture settings.
- Front bumpers to prevent damage to walls.

Length x width	1140 x 565 mm
----------------	---------------

Galvanised add-on shelf

IT450SHELF

- Add-on shelf for galvanised platform trolley (IT450) to transform it into a twin deck platform trolley.
- Durable galvanised finish for enhanced corrosion resistance suited to cool rooms, refrigerated areas and high-moisture settings.
- Front bumpers to prevent damage to walls.

Length x width	990 x 460 mm
----------------	--------------

Galvanised platform trolley (450 kg)

IT450G

- Durable galvanised finish for enhanced corrosion resistance suited to cool rooms, refrigerated areas and high-moisture settings.
- Front bumpers to prevent damage to walls.

Length x width	1140 x 565 mm
Height	950 mm
Wheel diameter	125 mm (four swivel)
Centre wheels	200 mm non-marking (two fixed)
Load capacity	450 kg

Galvanised platform trolley (450 kg)

IT450

- Durable galvanised finish for enhanced corrosion resistance suited to cool rooms, refrigerated areas and high-moisture settings.
- Front bumpers to prevent damage to walls.

Length x width	990 x 460 mm
Height	950 mm
Wheel diameter	125 mm (four swivel)
Centre wheels	200 mm non-marking (two fixed)
Load capacity	450 kg

Square safety step (Monstar)

SQSSMON

- Large safety step with rubber feet for safety.
- Durable one piece plastic construction with anti-slip surface.
- Stackable and totally mobile.

Load capacity	260 kg
Height	375 mm
Platform size	370 x 370 mm
Unit weight	3.5 kg

Galvanised platform trolley (450 kg)

IT450GTWIN

- Durable galvanised finish for enhanced corrosion resistance suited to cool rooms, refrigerated areas and high-moisture settings.
- Front bumpers to prevent damage to walls.

Length x width	1140 x 565 mm
Height	950 mm
Wheel diameter	125 mm (four swivel)
Centre wheels	200 mm non-marking (two fixed)
Load capacity	450 kg

Galvanised platform trolley (450 kg)

IT450TWIN

- Durable galvanised finish for enhanced corrosion resistance suited to cool rooms, refrigerated areas and high-moisture settings.
- Front bumpers to prevent damage to walls.

Length x width	990 x 460 mm
Height	950 mm
Wheel diameter	125 mm (four swivel)
Centre wheels	200 mm non-marking (two fixed)
Load capacity	450 kg

Galvanised bulk goods platform trolley (450 kg)

IT450BG

- Rust-proof finish, providing enhanced resistance to corrosion.
- Stable design with a wide wheelbase and low platform height to prevent tipping and enhance safety during transport.

Length x width	1140 x 800 mm
Height	950 mm
Wheel diameter	125 mm (four swivel)
Centre wheels	200 mm non-marking (two fixed)
Load capacity	450 kg

Galvanised platform trolley (450 kg)

IT450



*Pictured above:
Optional add-on
galvanised
twin-deck shelf
(IT450SHELF).*

\$415 (+ GST)

Galvanised platform trolley (450 kg)

IT450G



*Pictured above:
Optional add-on
galvanised
twin-deck shelf
(IT450GSHELF).*

\$450 (+ GST)

Galvanised add-on shelf

IT450SHELF



\$180 (+ GST)

Galvanised add-on shelf

IT450GSHELF



\$205 (+ GST)

Galvanised bulk goods platform trolley (450 kg)

IT450BG



\$713 (+ GST)

Galvanised platform trolley (450 kg)

IT450TWIN



\$595 (+ GST)

Galvanised platform trolley (450 kg)

IT450GTWIN



\$655 (+ GST)

Square safety step (Monstar)

SQSSMON



\$79 (+ GST)

Rugged (powered) bin lifter

BLEH1800

- Battery powered, electro-hydraulic operation.
- Suitable for up to 50 lifts per day.
- Fits through internal doorways.

Lift capacity	150 kg
Highest tip point	3752 mm
Skip bin compatibility	1800 mm
Wheelie bin compatibility	80, 120, 140 and 240 litre

Rugged (manual) bin lifter

BLHP1500

- Spark-free hydraulic hand pump operation.
- Suitable for up to 10 lifts per day, per person.
- Fits through internal doorways.

Lift capacity	100 kg
Highest tip point	3250 mm
Skip bin compatibility	1500 mm
Wheelie bin compatibility	80, 120, 140 and 240 litre

Ecolift bin lifter

ECOLIFT50

- Manual crank winding operation.
- Recommended up to 6 lifts per day, per person.
- Fits through internal doorways with winch handle removed.
- Lift-and-tilt mechanism.

Lift capacity	50 kg
Highest tip point	2800 mm
Skip bin compatibility	Up to 1500 mm
Wheelie bin compatibility	80, 120, 140 and 240 litre
Dimensions (L/W/H)	1200/800/2000 mm

Niftylift bin lifter

NIFTYLIFT30

- Manual assisted lift operation.
- Recommended up to 2 lifts per day, per person.
- Fits through internal doorways.
- Slow-release gas struts ensure the bin is lifted and lowered safely.

Lift capacity	30 kg
Highest tip point	2850 mm
Skip bin compatibility	1500 mm
Wheelie bin compatibility	120 and 240 litre
Dimensions (L/W/H)	900/800/1420 mm

Modular bin trailer

MODULAR6

- Move up to six wheelie bins.
- Gas strut actuated bin ramp.
- Fits within one standard car parking space.
- Comes with a pin-hitch coupling as standard.
- Also available with tow ball or bar hitch couplings.
- Supplied flat-packed ready for assembly.

Load capacity	240 kg (per bin bay)
Wheelie bin compatibility	80, 120, 140, 240 and 360 litre
Dimensions (L/W/H)	2874/1378/1447 mm

Modular bin trailer

MODULAR3

- Move up to three wheelie bins.
- Gas strut actuated bin ramp.
- Fits within one standard car parking space.
- Comes with a pin-hitch coupling as standard.
- Also available with tow ball or bar hitch couplings.
- Supplied flat-packed ready for assembly.

Load capacity	240 kg (per bin bay)
Wheelie bin compatibility	80, 120, 140, 240 and 360 litre
Dimensions (L/W/H)	2850/700/1432 mm

Universal bin lifter

UBL250HYD1800

- Push button operated.
- Will lift over 100 times per day on one charge.
- Safety cage, lockable door & braking castors.
- Lift-and-tilt mechanism.

Lift capacity	250 kg
Highest tip point	2800 mm
Skip bin compatibility	1800 mm
Wheelie bin compatibility	80, 120, 140 and 240 litre
Dimensions (L/W/H)	1500/980/2200 mm

Simplicity Plus bin lifter

SIMPLUS150HY1800

- Push button operated.
- Recommended up to 100 lifts per day.
- Safety cage and braking castors.
- Lift-and-tilt mechanism.

Lift capacity	150 kg
Highest tip point	2800 mm
Skip bin compatibility	1800 mm
Wheelie bin compatibility	80, 120, 140 and 240 litre
Dimensions (L/W/H)	1500/980/2200 mm

Niftylift bin lifter

NIFTYLIFT30



\$2,600 (+ GST)



Ecolift bin lifter

ECOLIFT50



\$4,200 (+ GST)



Rugged (manual) bin lifter

BLHP1500



Ask about our
All Terrain model.



\$6,900 (+ GST)



Rugged (powered) bin lifter

BLEH1800



Ask about our
All Terrain model.



\$9,300 (+ GST)



Simplicity Plus bin lifter

SIMPLUS150HY1800



\$12,400 (+ GST)



Universal bin lifter

UBL250HYD1800



\$12,900 (+ GST)



Modular bin trailer

MODULAR3



Bins not
included.

\$2,500 (+ GST)



Modular bin trailer

MODULAR6



\$5,000 (+ GST)



Tug Axis 4T

TUGAXIS4TNH

- Tow up to 4 tonne on flat ground, with reduced towing capacity up to 8 degrees.
- Battery operated.
- Turret with turret lock for easy reversing.
- A wide range of hitches available.
- Suitable for large retail and heavy industrial towing.

Load capacity	4000 kg
Maximum speed	Up to 5 km / hour
Speed mode	Three speed control with forward, reverse and emergency stop.
Dimensions	1465/790/875 mm

Tug Axis 2T

TUGAXIS2TNH

- Tow up to 2 tonne on flat ground, with reduced towing capacity up to 8 degrees.
- Battery operated.
- Turret with turret lock for easy reversing.
- A wide range of hitches available.
- Suitable for retail and light industrial towing.

Load capacity	2000 kg
Maximum speed	Up to 5 km / hour
Speed mode	Three speed control with forward, reverse and emergency stop.
Dimensions	1480/610/852 mm

Tug Axis 1T

TUGAXIS1TNH

- Tow up to 1 tonne on flat ground, with reduced towing capacity up to 8 degrees.
- Battery operated.
- Turret with turret lock for easy reversing.
- A wide range of hitches available.
- Suitable for retail and light industrial towing.

Load capacity	1000 kg
Maximum speed	Up to 5 km / hour
Speed mode	Three speed control with forward, reverse and emergency stop.
Dimensions	1480/610/852 mm

Tug Compact

TUGCOM500NH

- Tow up to 500 kg on flat ground.
- Battery operated.
- Non-marking tyres.
- Wide variety of hitches available.
- Suitable for medical & commercial towing.

Load capacity	500 kg
Maximum speed	Up to 5 km / hour
Speed mode	Three speed control with forward, reverse and emergency stop.
Dimensions	650/610/934 mm

Strong Arm Hoist

SIS4HW

- A cantilever crane designed to be statically bolted to a concrete floor (such as a loading bay).
- A hand winch is low-g geared to ensure loads of up to 500 kg can be easily raised, while precise positioning of the load is achieved through geared hand-slewing of the mast.
- Suitable for lifting loads between floors.
- Ideal for plant equipment, workshops, manufacturing, factories.

Lift capacity	500 kg
Operation method	Hand winch
Dimensions (L/W/H)	1171/508/1557 mm

Powered bin trolley

POWBINTROLLEY

- Move up to three wheelie bins, weighing up to 400 kg over a flat surface.
- Powered drive wheel can carry loads over ramps up to 5°.
- Smart design with easy turning action.
- Tiller control keeps you in front of load.
- Made in Australia.

Load capacity	400 kg
Maximum speed	Up to 4 km / hour
Wheelie bin compatibility	80, 120, 140 and 240 litre
Dimensions (L/W/H)	2887/739/1596 mm

Tug Rise 1T

TUGRISE1TNH

- Tow up to one tonne on a 15° incline.
- Battery operated.
- A wide range of hitches available.
- Suitable for moving heavy bins and trolleys on sloped driveways and ramps, around high-rise buildings/apartment basements, or around caravan parks.

Load capacity	2000 kg
Maximum speed	Up to 3 km / hour
Speed mode	Three speed control with forward, reverse and emergency stop.
Dimensions	1800/902/894 mm

Tug Axis 5T

TUGAXIS5TNH

- Tow up to 5 tonne on flat ground, with reduced towing capacity up to 8 degrees.
- Battery operated.
- Turret with turret lock for easy reversing.
- A wide range of hitches available.
- Suitable for large retail and heavy industrial towing.

Load capacity	5000 kg
Maximum speed	Up to 5 km / hour
Speed mode	Three speed control with forward, reverse and emergency stop.
Dimensions	1740/900/905 mm

Tug Compact

TUGCOM500NH

Ask about our range of hitches.



\$ 10,800 (+ GST)



Tug Axis 1T

TUGAXIS1TNH

Ask about our range of hitches.



\$ 13,500 (+ GST)



Tug Axis 2T

TUGAXIS2TNH

Ask about our range of hitches.



\$ 14,600 (+ GST)



Tug Axis 4T

TUGAXIS4TNH

Ask about our range of hitches.



\$ 17,900 (+ GST)



Tug Axis 5T

TUGAXIS5TNH

Ask about our range of hitches.



\$ 18,900 (+ GST)



Tug Rise 1T

TUGRISE1TNH

Ask about our range of hitches.



\$ 19,500 (+ GST)



Powered bin trolley

POWBINTROLLEY



\$ 12,500 (+ GST)



Strong Arm Hoist

SIS4HW



\$ 5,500 (+ GST)